


Luffing


載荷表 Load Chart

R (m)	倍率 Fall	R(C _{max}) (m)	C _{max} (t)	20	25	30	35	40	45
45	U	36.9	2.9	2.9	2.9	2.9	2.9	2.6	2.2
40	U	36.9	2.9	2.9	2.9	2.9	2.9	2.6	
35	U	35.0	2.9	2.9	2.9	2.9	2.9		
30	U	30.0	2.9	2.9	2.9	2.9			


- 工作狀態支反力
Reaction in service
- 非工作狀態支反力
Reaction out of service
- ⊗ 整機自由高度重量 (不含平衡重及壓重重量)
Total weight for free standing crane
without counterweight & ballast.

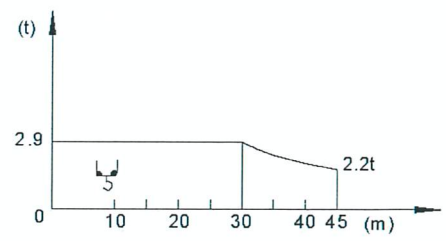


L ₁	30m 臂 jib
L ₂	35m 臂 jib
L ₃	40m 臂 jib
L ₄	45m 臂 jib

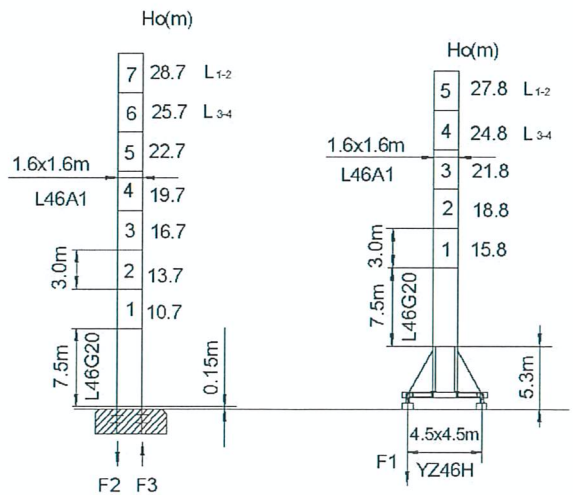


	●	■
F2	100t	119t
F3	78t	97t
⊗	41.3t	

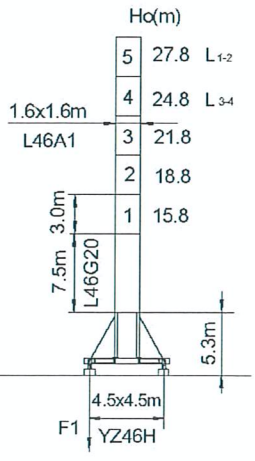




	●	■
F1	60t	68t
⊗	49.7t	

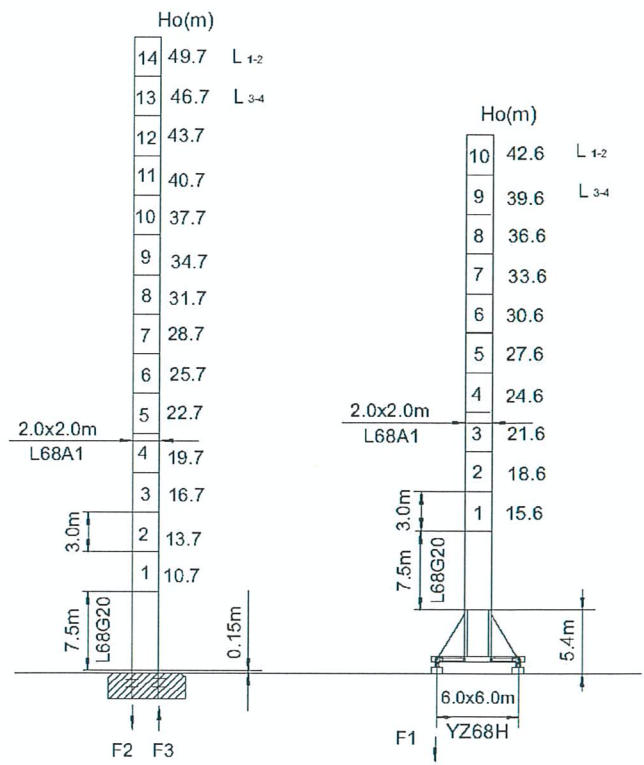

	●	■
F2	105t	192t
F3	80t	165t
⊗	55.6t	

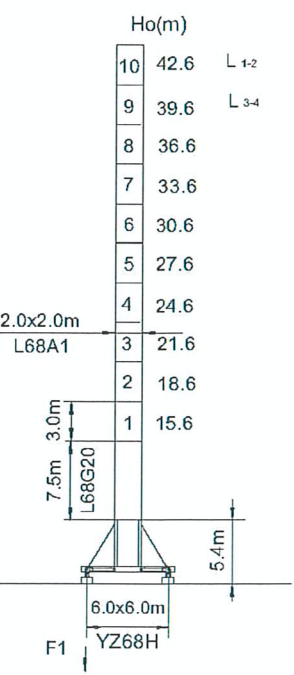

	●	■
F1	70t	94t
⊗	63.8t	

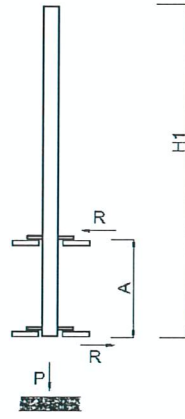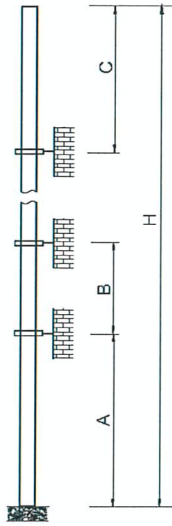

樓板最小開口
Min. Opening of Floor

塔身節 Mast	臂長 Jib length	A (m)	B (m)	C (m)	H (m)
L46A1 [⊙]	L1-2	36	27	25.5	127.7
	L3-4	33	24	22.5	>127.7*
L68A1	L1-2	39	37	31.5	145.7
	L3-4	36	24	28.5	>145.7*

塔身節 Mast	臂長 Jib length	H1 (m)	A (m)	P (t)	R (t)	X (m)	Y (m)
L46A1	L1-2	30.9	18	※	※	2.15	1.80
	L3-4	27.9	18	※	※	2.15	1.80
L68A1	L1-2	45.9	18	※	※	2.58	2.17
	L3-4	42.9	18	※	※	2.58	2.17

⊙ 需加臨時附著 Need add temporary anchorage

主要性能參數 Main Specifications

機構 Mechanism					電動機 Motor kW
		m/min	t		
	24PQC15L	0—8.5	3.0	400m >400m*	24/24/6
		0—40	2.5		
		0—80	1.5		
	30LYWZ40	15°—85°	3.0min		30
	4RFCV	0—0.7 rpm			2x4
	RTC190	0—0.7 rpm			2x95 N·m
	YMD50	0—0.7 rpm			2x5.5
	RT	12.5—25 m/min			2x2.6/5.2

		kVA
380V (±5%)	50 Hz / 60 Hz	80

* ※ 與製造商聯繫 Contact with us, please.

Copy Right ©YONGMAO 2008

地址：中國遼寧省撫順市順城區環大路3號 郵編：113126
 Add: No.3 Yuanda Road, Shuncheng District, Fushun, Liaoning, P.R.China
 Tel: 86-413-7648899 Fax: 86-413-7649999
 E-mail: sun@yongmao.com.cn

ISO9001:2000



YONGMAO HOLDINGS LIMITED

控永
股茂