


	H
①	②
H1	H+7.1
H2	H+8.4
H3	H+9.7
	H+30.6
	H+35.6
	H+40.6
	H+31.7
	H+36.2

L1	30m=1+2+4+5
L2	35m=1+2+2+5
L3	40m=1+2+2+4+5

Tower height	H
Maximum jib	①
Minimum jib(in service)	②
Minimum jib(out of service)	③

钩底高度 Height under hook

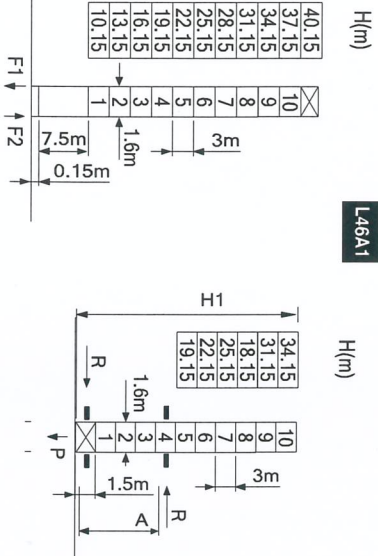

L46A1

A min	9m
R max	35t
P max	42t


请垂询我们 Please consult us
 工作状态 In service 非工作状态 Out of service 自重 Without load and cables with longest jib and maximum height

负荷特性 Load diagrams

Load Diagram	20m	22m	25m	27m	30m	32m	35m	37m	40m
10m	2 fall/s	2.9t	2.9	2.9	2.9	2.62	1.96	1.74	1.5
35m	2 fall/s	2.9t	2.9	2.9	2.9	2.81	2.52	2.14	
30m	2 fall/s	2.9t	2.9	2.9	2.9	2.9	2.9	2.9	

附着 Anchorages

L46A1 > 124.15m 请联系我们 Please consult us.

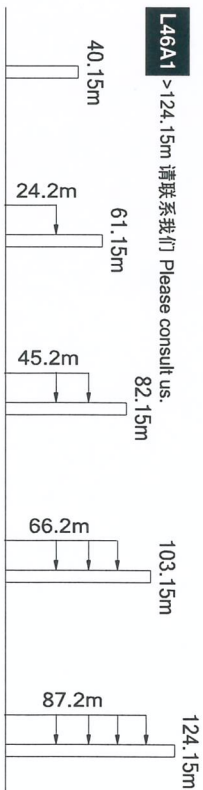

机构 Mechanisms

Mechanism	Model	Speed	Gear Ratio						Rope length
			1	3	2.2	1.2	1.8	2.4	
起升 Hoisting	35L/V-F15L	m/min	0~34	0~47	0~62	0~82	0~113	0~143	22kW
		t	0~22.6	0~31.3	0~41.3	0~51.3	0~61.3	0~71.3	>300m*
		t	4.5	3.3	1.8	1.2	0.8	0.6	
		t	0~17	0~23.5	0~31	0~39	0~47	0~55	
		t	6	4.4	2.4	1.6	1.1	0.8	
旋转 Luffing	24L FV15B	°/min	0~40S						
回转 Slewing	RV/F4	°/0.8r/min	4KW						
行走 Travelling	RT324	°/25m/min	2X5.2KW						
	380V(±5%) 50Hz		69kVA						

请垂询我们 Please consult us.