



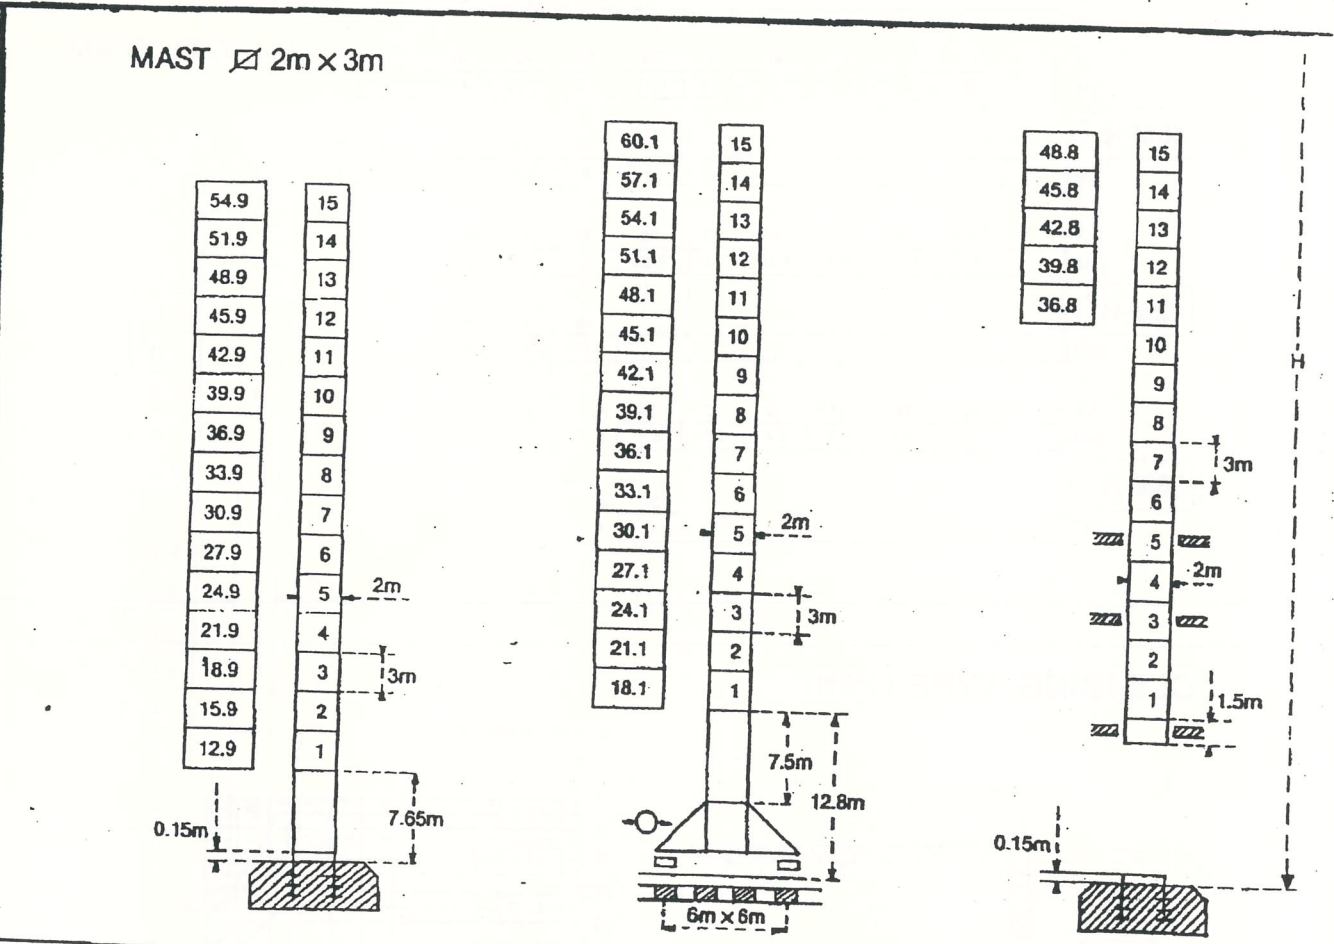

# HT-320

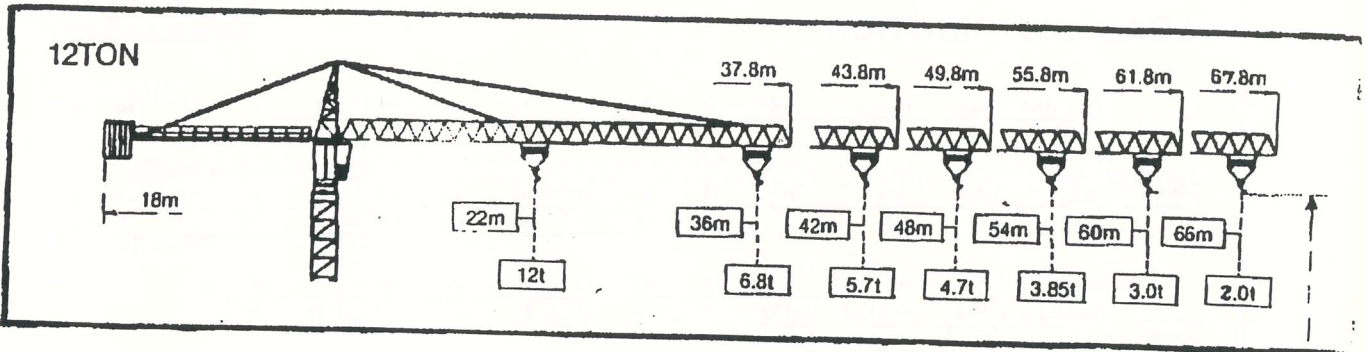

	SPEED (M/min)	MOTOR	REMARKS
SLEWING	0-0.7 tr/min	2 x 7.5 kW	TOTAL POWER REQUIREMENT 100KVA MAIN SUPPLY 440V 3Ph 60Hz
JIB TROLLEY	0-80 m/min	7.5 kW	
TRAVELLING	C-25 m/min	4 x 3.7 kW	

HOISTING MOTION		SPEED (M/min)		RATED LOAD (KG)	MOTOR
SINGLE	SM 	LOW	0-32	6,000	45 KW
		HIGH	0-64	3,000	
DOUBLE	DM 	LOW	0-16	12,000	
		HIGH	0-32	6,000	

# LOAD DISTRIBUTION HT-320 시퀀스

66M-R

2.9	15.6	21	24	27	30	33	36	39	42	45	48	51	54	57	60	63	66
DM	12	8.66	7.4	6.42	5.64	5	4.47	4	3.63	3.3	3	2.74	2.51	2.31	2.12	1.95	1.8

SM

29	36	39	42	45	48	51	54	57	60	63	66
6	4.67	4.2	3.83	3.5	3.2	2.94	2.71	2.51	2.32	2.15	2

60M-R

2.9	18.6	21	24	27	30	33	36	39	42	45	48	51	54	57	60
DM	12	10.6	9.1	7.9	7.1	6.2	5.6	5.1	4.6	4.2	3.85	3.55	3.25	3	2.8

SM

35	32	39	42	45	48	51	54	57	60
6	5.8	5.3	4.8	4.4	4.05	3.75	3.45	3.2	3

54M-R

2.9	20.4	21	24	27	30	33	36	39	42	45	48	51	54
DM	12	11.6	10	8.7	7.65	6.9	6.15	5.6	5.1	4.7	4.25	3.95	3.65

SM

38	39	42	45	48	51	54
6	5.8	5.3	4.9	4.45	4.15	3.85

48M-R

2.9	21.1	24	27	30	33	36	39	42	45	48
DM	12	10.4	9.1	8	7.15	6.45	5.8	5.35	4.9	4.5

SM

39	42	45	48
6	5.55	5.1	4.7

42M-R

2.9	21.6	24	27	30	33	36	39	42
DM	12	10.7	9.3	8.25	7.35	6.65	6	5.5

SM

40	42
6	5.7



36M-R

2.9	22	24	27	30	33	36
DM	12	10.9	9.5	8.4	7.5	6.8

SM

36
6

## CLIMBING TYPE (상승형)

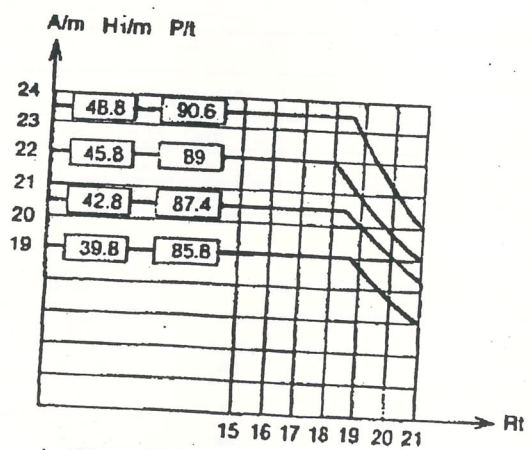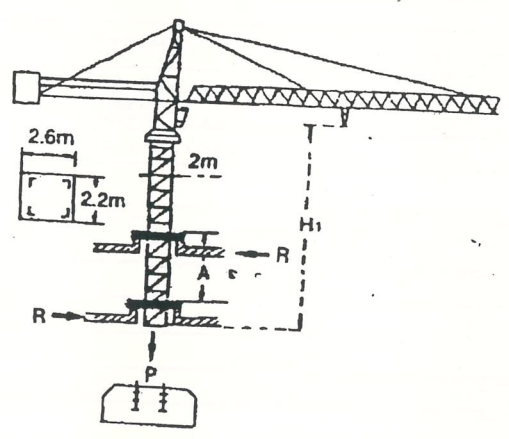

A: (Distance between collars) 상승형 칼라 간격  
 H1: (Crane height) 직업높이  
 P: (Crane Weight (in service)) 크레인 자중  
 R: (Horizontal reaction) 옆으로 미치는 힘